

RAG ARIZONA GAIN


RETRO PROIEZIONE / REAR PROJECTION



Grigio / Grey


Lato gofrato verso il pubblico / Embossed side toward audience

CODICE CODE	LARGHEZZA WIDTH	LUNGHEZZA ROLL LENGTH	SPESSORE THICKNESS	COMPOSIZIONE COMPOSITION	PESO WEIGHT
RAG220P	220 cm	100 m	0,30 mm	100% PVC	405 g/m ²

REAZIONE AL FUOCO REACTION TO FIRE		IGNIFUGO PERMANENTE Film vinilico intrinsecamente resistente al fuoco e autoestinguente.	IFR - INHERENTLY FLAME RETARDANT Inherently flame resistant and self-extinguishing vinyl film.
--	---	--	--

CERTIFICATI DI IGNIFUGAZIONE FR CERTIFICATIONS		EN 13501-1 classe B s1 d0 UNI 9177 classe 1 NFP 92-507 classe M1 NFPA 701 pass	EN 13501-1 class B s1 d0 UNI 9177 class 1 NFP 92-507 class M1 NFPA 701 pass
--	---	---	--

CARATTERISTICHE FEATURES	<ul style="list-style-type: none"> Utilizzo: retro proiezione (tipico) e proiezione frontale Opacità: traslucido Guadagno max: 1,55 retro proiezione Guadagno max: 0,38 proiezione frontale 	<ul style="list-style-type: none"> Use: rear projection (typical) and front projection Opacity: translucent Peak gain: 1.55 rear projection Peak gain: 0.38 front projection
------------------------------------	---	--

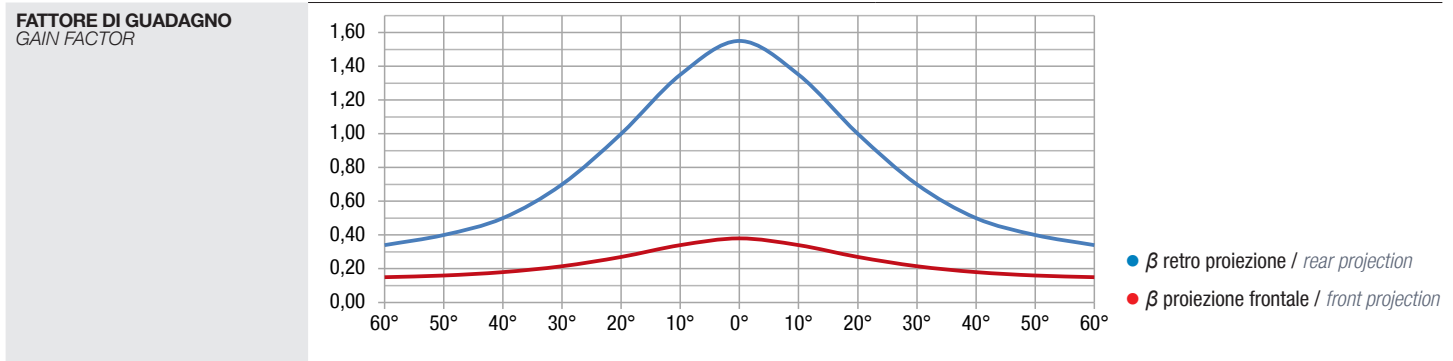

DISPONIBILITÀ AVAILABILITY	<ul style="list-style-type: none"> A metro Rotoli interi Schermi realizzati su misura 	<ul style="list-style-type: none"> By the metre Full rolls Custom manufactured screens
--------------------------------------	--	---

NOTE NOTES	La piegatura potrebbe causare piccoli segni bianchi (fenomeno irreversibile detto crazing), specialmente a basse temperature (< 15 °C).	Folding may cause small white marks (irreversible phenomenon called crazing), especially at low temperature (< 15 °C).
----------------------	---	--